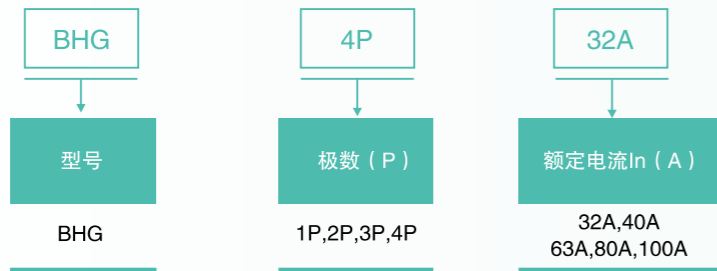


BHG系列隔离开关

适用范围及功能:

适用于民用、工业及商业建筑配电系统
用于保护及控制电路，主要作为终端组合电器中的总开关，也可用于不频繁控制各类小功率电器和照明，
在电路中能接通、承载、分断、隔离电流

型号及其含义:







符合标准: IEC 60947-3 / GB 14048.3

技术参数:

额定电压: AC230V/400V
额定电流: 32~100A
机械寿命: 50,000次

接线能力: 软线 16mm² / 硬线 25mm²
环境温度: -5℃ ~ +40℃


类型	额定电压 V	额定电流 A	宽度 mm	重量 g	产品型号
1P 	230	32	18	85	BHG1P32A
	230	40	18	85	BHG1P40A
	230	63	18	85	BHG1P63A
	230	80	18	85	BHG1P80A
	230	100	18	85	BHG1P100A
2P 	400	32	36	172	BHG2P32A
	400	40	36	172	BHG2P40A
	400	63	36	172	BHG2P63A
	400	80	36	172	BHG2P80A
	400	100	36	172	BHG2P100A
3P 	400	32	54	259	BHG3P32A
	400	40	54	259	BHG3P40A
	400	63	54	259	BHG3P63A
	400	80	54	259	BHG3P80A
	400	100	54	259	BHG3P100A
4P 	400	32	72	346	BHG4P32A
	400	40	72	346	BHG4P40A
	400	63	72	346	BHG4P63A
	400	80	72	346	BHG4P80A
	400	100	72	346	BHG4P100A

附件

功能说明:

不需工具，直接卡装在小断路器左侧即可
每台断路器最多可安装3个辅助装置
每台断路器最多可安装2个辅助触点装置



型号及其含义:

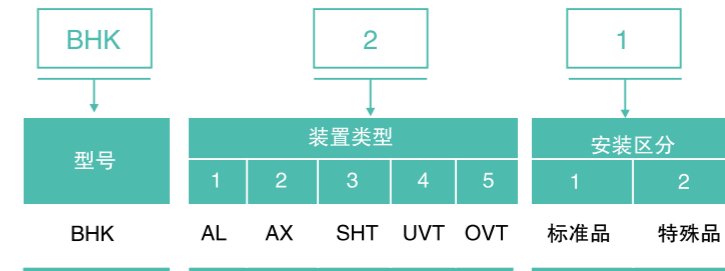

注:

1-标准品: 直接安装于断路器左侧第一极
2-特殊品: 安装于其它辅助装置左侧



类型	辅助触点 AC/12	宽度 (mm)	产品型号
AL 报警装置		9	BHK11
AX 辅助触点装置		9	BHK21 BHK22

